

# SANDING

Pneumatic Compact Sander

## ORBITAL SANDER

Model **OSV-60A** 

**Heavy-duty and powerful with adjustable speed regulator**

- Powerful dual action for tough applications
- Standard with dust extraction system
- Rugged construction for years of reliable performance




### Specifications

Model	OSV-60A	
Air Pressure	MPa (kgf/cm <sup>2</sup> )	0.6 (6)
Air Consumption (No-load)	m <sup>3</sup> /min	0.68
Free Speed	min <sup>-1</sup> (rpm)	8500
Orbit Diameter	mm	10
Paper Size	mm	150 (6")
Pad Type		PSA with 6 holes
Inlet Size		Rc 1/4
Mass (Weight)	kg	2
Accessories Included	<ul style="list-style-type: none"> <li>• Dust Collection Ass'y with Dust Bag</li> <li>• Single Ended Spanner 17</li> <li>• Bushing R 1/4 x NPT 1/4</li> <li>• Brush</li> </ul>	



### Random orbital action creates a professional finish

By offsetting the sanding pad shaft, fast aggressive sanding is achieved while dramatically reducing swirl patterns. Speed adjustments allow for the best speed for the best job.




Pneumatic Compact Sander

## PALM ORBITAL SANDER

Model **APS-125** 

Model **APS-150** 

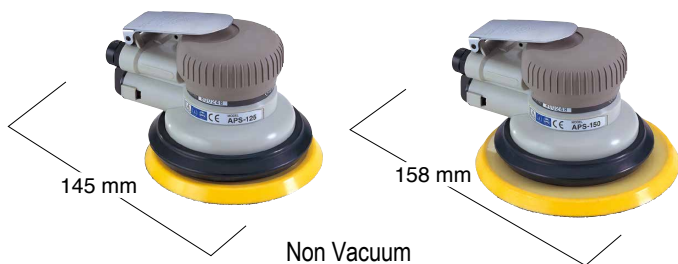

### Ergonomic lightweight design


- Extremely light. APS-125 weighs just 690 g
- Ergonomically designed for operator convenience and comfort
- Powerful high speed 10000 RPM motor
- Ultra small orbital action for high quality swirl-free finishes
- Available with 125 mm or 150 mm pads
- Variable speed control

### Applications

- Feather edging, metal preparation, and finishing work on body filler
- Curved surface sanding and corner rounding in wood work

### Random orbital action creates a professional finish

By offsetting the sanding pad shaft, fast aggressive sanding is achieved while dramatically reducing swirl patterns. Speed adjustments allow for the best speed for the best job.



### Specifications

Model	APS-125	APS-150	
Air Pressure	MPa (kgf/cm <sup>2</sup> )	0.6 (6)	
Air Consumption (No-load)	m <sup>3</sup> /min	0.45	
Free Speed	min <sup>-1</sup> (rpm)	10000	
Orbit Diameter	mm	5	
Paper Size	mm	125 (5")	150 (6")
Pad Type	Leather or Velcro with 5 holes	Velcro with 6 holes	
Inlet Size		Rc 1/4	
Mass (Weight)	kg	0.69	0.72
Accessories Included	<ul style="list-style-type: none"> <li>• 17 mm Single Ended Spanner</li> <li>• Bushing R 1/4 x NPT 1/4</li> </ul>		

### For Self Vacuum & Central Vacuum

The non-vacuum model is available from stock and can easily be modified to self-vacuum or central vacuum type.

#### Self Vacuum



Optional parts required for adding Self Vacuum function

TQ04685 Stopper  
TB03594 Ejector Ass'y  
LQ02848 P Tapping Screw  
TA99239 Hose Ass'y  
TP14836 Dust Bag

#### Central Vacuum



Optional parts required for adding Central Vacuum function

TQ04682 Ejector  
LQ02848 P Tapping Screw