

**PJH**  
Plug-In Extended Elbow



MODEL[ØD-T] Tube(Metric)-Thread(R)

MODEL	B	C	ØD1	ØD2	ØD3	ØF1	ØF2	L1	L2	W.G(g)	Qty/Inbox
PJH 04-04	36	16	4	4.8	5.9	2	2	18	17	0.9	100
PJH 04-05	36	16	4	6	6.9	2	4.2	18	17	0.8	100
PJH 06-05	41	17	6	5.9	6.9	4	4	23	17	1.1	100
PJH 06-06	41	17	6	6.8	7.9	4	4	23	17	1.4	100
PJH 08-06	43	18.5	8	6.8	7.9	6	4	25	17	1.7	100
PJH 08-08	48.2	18.5	8	8.6	10	6	6	25	22	2.3	100
PJH 10-08	50.2	21	10	8.6	10	8	6.2	27	22	2.7	100
PJH 12-08	54.2	22.5	12	8.6	10	10	6.2	31	22	2.8	100
PJH 12-10	54.7	22.5	12	10.6	12	10	8	31	22.5	3.1	50
PJH 12-13	55	22.5	12	13.5	15	10	10	31	22.5	5	50
PJH 14-14	59.5	24.5	14	14.7	16	12	10	35.5	22.5	5.8	50
PJH 04-1/8	36	16	4	3.8	5	2	2	17	17	0.5	100
PJH 08-1/4	43	18.5	8	7.3	8.5	6	4.6	24	17	1.7	100
PJH 10-1/4	45.2	21	10	7.3	8.5	8	4.6	26	17	2.3	100
PJH 12-1/2	55	22.5	12	13.2	14.5	10	10	30	22.5	4.7	50
PJH 14-1/2	59.5	24.5	14	13.2	14.5	12	10	34.5	22.5	4.8	50

**PP**  
Plug



MODEL[ØD-T] Tube(Metric)-Thread(R)

MODEL	ØD	B	ØP	C	W.G(g)	Qty/Inbox
PP 04	4	30	2	19	0.4	100
PP 06	6	34	3	20	0.7	100
PP 08	8	38	4	22	1.4	100
PP 10	10	41	5	25	2	50
PP 12	12	43	7	27	3.6	50
PP 16	16	47	9	31	4	25


**PIG**  
Reducer Tube Splicer



MODEL[ØD-T] Tube(Metric)-Thread(R)

MODEL	ØD1	ØD2	B	C1	C2	Friction (Ø/mm)	W.G(g)	Qty/Inbox
PIG 06-04	6	4	37.5	18.6	17.7	2	0.7	100
PIG 08-04	6	4	44	22	19	2	0.9	100
PIG 08-06	8	6	41.2	20.6	18.6	4	1.5	100
PIG 10-06	10	6	48	25	20	4	1.6	100
PIG 10-08	10	8	45	22.6	20.4	5	2.8	100
PIG 12-08	12	8	52	27	22	5	2.6	50
PIG 12-10	12	10	49.8	25.4	22.4	5.5	4.9	50
PIG 16-12	16	12	54	27	25	9	8.2	50

**GPYJ**  
Plug-in Y

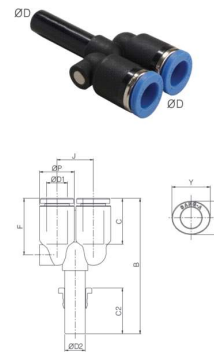

MODEL[ØD-T] Tube(Metric)-Thread(R)

MODEL	ØD1	ØD2	ØP	B	C1	C2	F	J	X	Y	Friction (Ø/mm)	W.G(g)	Qty/Inbox
GPYJ 04	4	4	9	37.8	14.5	14.5	16	9.3	8.6	10.8	2	3.4	100
GPYJ 06	6	6	11.2	45	15.5	15.5	17.2	11.4	11	13	3.5	5.4	50
GPYJ 08	8	8	13.6	53.1	17.8	17.8	22	14.2	13	15	4.4	9.2	50
GPYJ 10	10	10	16.3	56	19.4	19.4	22.6	17	16	18.5	5.6	13.5	25
GPYJ 12	12	12	19.7	63.4	22.4	22.4	27.2	20	19.5	22.5	6.4	24.0	20