


# KW-T160V EVO

## 1/2 " Sq. Dr. Impact Wrench

### Advantageous Wrench

- ◆ Advanced Twin Hammer and oil bath design to achieve more durability and higher torque.

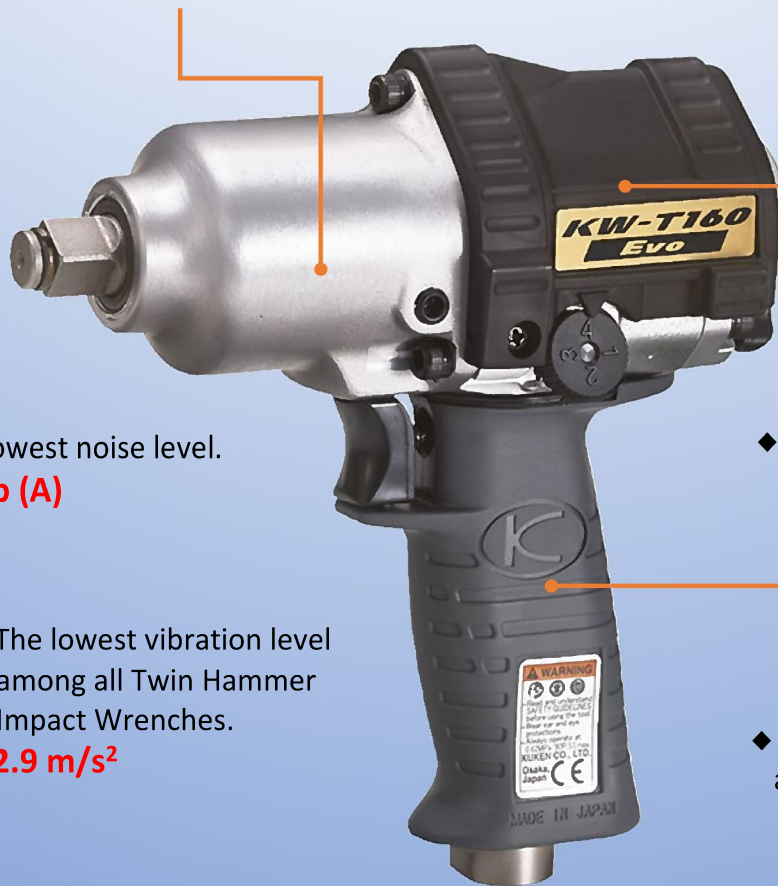

- ◆ The lowest noise level.  
**78 db (A)**

- ◆ The lowest vibration level among all Twin Hammer Impact Wrenches.  
**2.9 m/s<sup>2</sup>**

- ◆ Powerful motor produces up to **660 Nm (490 ft - lb)**.

- ◆ Ergonomic grip insulates and absorbs vibration.

AIR TOOL EVOLUTION

ALL JAPAN MADE

### Specifications

Sq. Dr. Size		Bolt Size Capacity		Max Torque		Torque Range		Free Speed	Length		Weight		Air Consumption		Noise Level	Vibration Level
in.	mm	in.	mm	Nm	ft-lb	Nm	ft-lb	rpm	in.	mm	kg	lbs.	c.f.m	m <sup>3</sup> /min	dB (A)	m/s <sup>2</sup>
1/2	12.7	5/8	16.0	660	490	100-400	70-300	6,300	6-3/4	171.0	1.5	3.3	9.2	0.26	78	2.9



### KUKEN CO., LTD.

3-6-15 Nonoue, Habikino-shi, Osaka 583-0871, Japan  
Tel : +81-72-953-3346 Fax : +81-72-953-0605



CAT NO. 020420-160V